




EIBENSTOCK
Elektrowerkzeuge

100 1919
JAHRE 2019

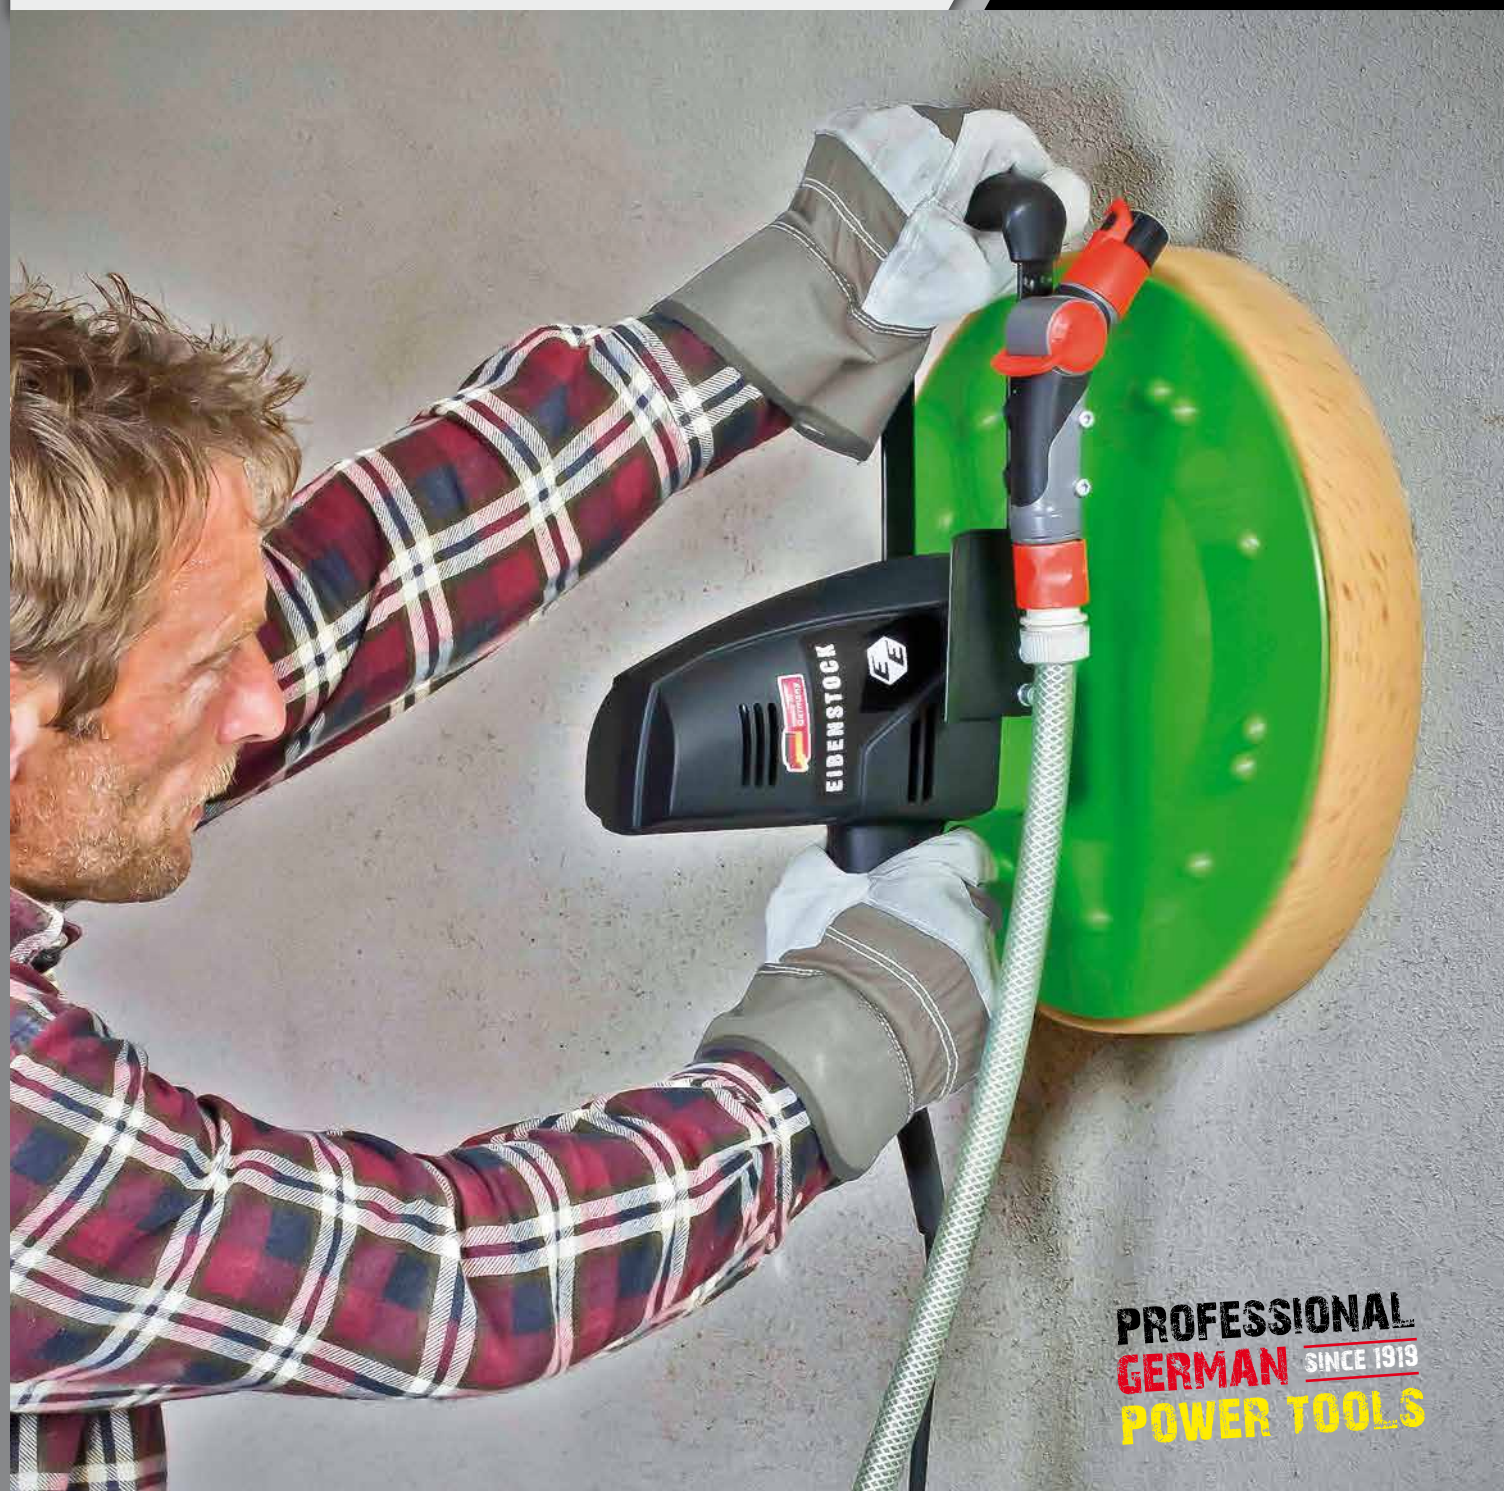

PROFESSIONAL
GERMAN SINCE 1919
POWER TOOLS

EPG 400 / EPG 400 WP
EWS 400

Work on plaster and sanding of heat insulations



Plaster smoothing machines EPG 400 and EPG 400 WP



The versatile plaster smoothing machine

in the past



Now



saves at least
50 % time

Smoothing, scraping and structuring of plaster. Sanding of panels for heat insulations. Smoothing and cleaning of surfaces.

Large tool surface – smooth and quick working

Low weight – for effortless work

Vertical motor arrangement, large handles – balanced, ergonomic design, convenient working

Electronic switch – stepless speed control

Triple special gearbox – high torque, powerful, durable

EPG 400 WP in addition with: Stepless adjustable water supply – direct moistening of the wall by means of an atomised spray, saves adding water separately, thus time saving



Specifications	EPG 400	EPG 400 WP
Power input	500 W	500 W
Rated voltage	230 V~	230 V~
Rated speed	0-60 rpm	0-60 rpm
No-load speed	0-110 rpm	0-110 rpm
Diameter base plate	370 mm	370 mm
Spindle connection	Push fit fitting/velcro	Push fit fitting/velcro
Weight	3.5 kg	3.8 kg
Order no.	06509000	0650L000
Supplied	in a case incl. base plate and sponge disc	

We recommend as accessories: EIBENSTOCK Water tank





Insulation board sander **EWS 400**



100 JAHRE 1919 2019

The insulation board sander for large surfaces

in the past



Now



saves at least
50 % time

Sanding of foamed polystyrene and mineral insulation panels for heat insulations

Dust extraction by hood with brush rim and perforated sanding disc – emission of sanding dust and particles is effectively removed, saves time-consuming cleaning of the construction site

Flexible hood – gets close to the surface

Dust extraction – direct connection for industrial vacuum cleaner

Große Werkzeugfläche – planebenes und schnelles Arbeiten

Vertical motor arrangement, large handles – balanced, ergonomic design, convenient working

Electronic switch – stepless speed control

Triple special gearbox – high torque, powerful, durable




Health-endangering dusts (for example fumed silica) must be extracted by a vacuum cleaner with dust class M approval!

We recommend a class M vacuum cleaner for our power tools from the EIBENSTOCK DSS series.



Specifications	EWS 400
Power input	800 W
Rated voltage	230 V~
Rated speed	0-85 rpm
No-load speed	0-140 rpm
Diameter base plate	370 mm
Spindle connection	Push fit fitting/velcro
Weight	3.9 kg
Order no.	0620F000
Supplied	in a box incl. 1x sandpaper P24

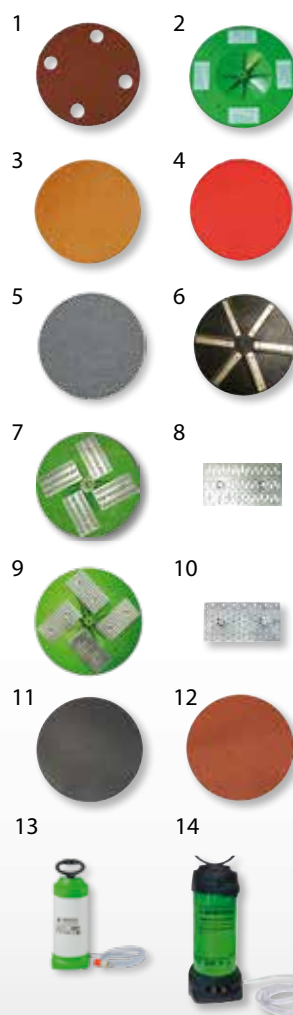

	EPG 400	EPG 400 WP	EWS 400	
1 Sandpaper (velcro), 4 hole punch, P24 (3 pieces)			•	37671000
2 Base plate Ø 370 mm	•	•		37721000
3 Sponge disc Ø 400 mm (velcro)	•	•		37722000
4 Sponge rubber disc Ø 385 mm (velcro)	•	•		37725000
5 Felt disc Ø 395 mm	•	•		37729000
6 Scraping disc Ø 380 mm (velcro)	•	•		37726000
7 Scratching & scraping disc Ø 370 mm	•	•		065A1000
8 Add on kit for scratching & scraping disc (set of 5 scratching metal sheets + 10 screws)	•	•		3772B000
9 Scratching disc Ø 370 mm	•	•		37724000
10 Add on kit for scratching disc (set of 5 scratching metal sheets + 10 screws)	•	•		37723000
11 Smoothing disc Ø 380 mm	•	•		37728000
12 Sanding disc P24, Ø 370 mm (velcro)	•	•		37727000
13 Water tank, 5 l plastic		•		35811000
14 Water tank, 10 l metall		•		35812000



Specifications	DSS 25 M	DSS 35 M iP
max. power input	1400 W	1600 W
Rated voltage	230 V~	230 V~
Tank volume (max.)	25 l	35 l
Dust volume (net)	20 l	25 l
max. air flow	61 l/s	64 l/s
max. vacuum	248 mbar	259 mbar
Weight	12.7 kg	15.0 kg
Order no.	09917000	09919000
Supplied	in a case incl. accessories	in a case incl. accessories

Elektrowerkzeuge GmbH Eibenstock
Auersbergstraße 10
D-08309 Eibenstock

Phone: +49 (0) 3 77 52 - 50 30
Fax: +49 (0) 3 77 52 - 20 19
Internet: www.eibenstock.com
E-Mail: office@eibenstock.com

Zertifiziert nach DIN EN ISO 9001:2008
Technical changes excepted! Illustrations may vary!

Your dealer: